

## EASY RAKE - EASY RAKE SUPERSTAR - EASY RAKE AUTOSTEER

### TECHNICAL FEATURES

MODEL	# of Wheels	Teeth per Wheel	Wheel Diameter	Work Width	Qty.Tires	Weight lbs.
EZR-010	10	40	55"	21' 5"	4	2,869
EZR-012	12	40	55"	24' 4"	4	3,046
EZR-014	14	40	55"	27' 4"	6	3,708
EZR-016	16	40	60"	31' 4"	8	4,967
EZR-018	18	40	60"	34' 3"	12	5,717
EZR-020	20	40	60"	37' 5"	12	6,068



AGRICULTURAL  
MACHINERY

SIN CERT



REG. N. 1292-A  
UNI EN ISO 9001:2000

**ENOAGRICOLA ROSSI S.r.l.**

Via Cortonese, SN

06018 Calzolaro di Umbertide (PG)

Tel. +39 075 930 22 22

Fax +39 075 930 23 28

info@enorossi.it

[www.enoagricolarossi.com](http://www.enoagricolarossi.com)



project and visual design: [www.manoberlandini.com](http://www.manoberlandini.com)

Design and/or specifications are subject to change without notification.



AGRICULTURAL  
MACHINERY




*Pull type V rake*

**EASY RAKE  
EASY RAKE SUPERSTAR  
EASY RAKE AUTOSTEER**

UK

# EASY RAKE

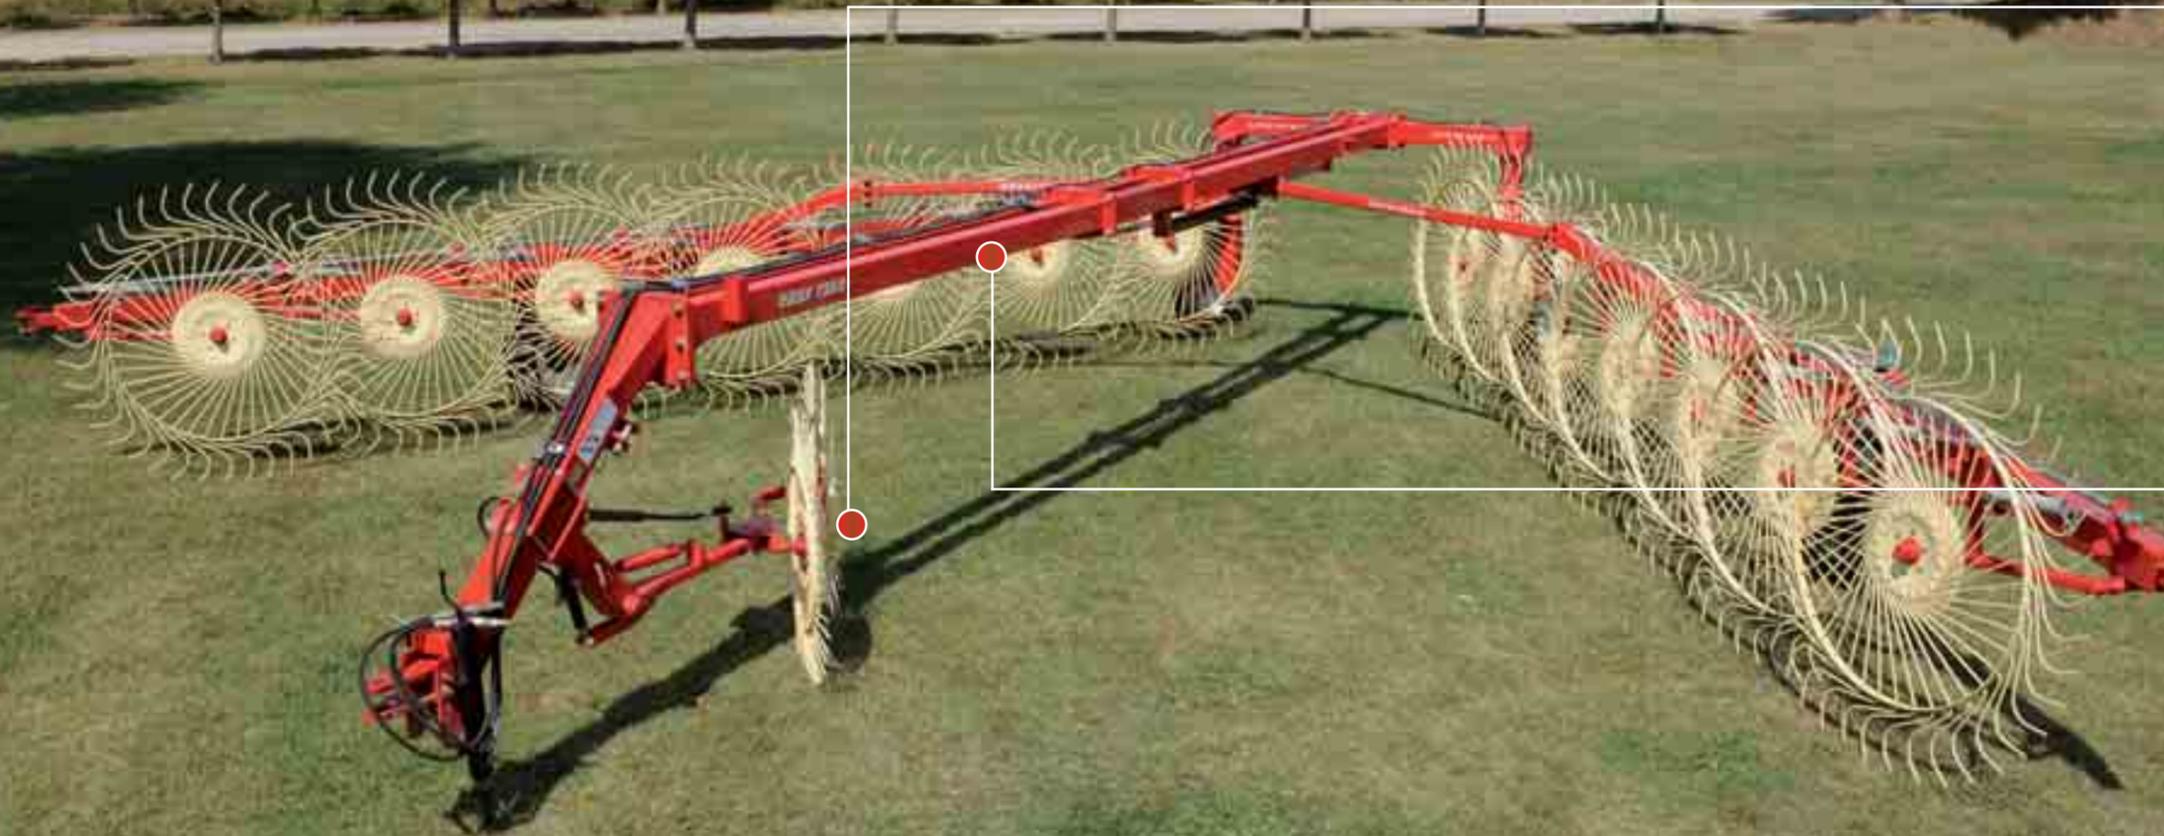

Hydraulically controlled double center kicker wheel



Double beam pull bar.



Single side configuration

## Pull type V rake - EASY RAKE

**Enoagricola Rossi** Enoagricola Rossi is proud to introduce the Easy Rake. It's easy to assemble and easy to use.

The Easy Rake has been designed with a series of innovations that are unique to the market that improves operator productivity. The two sides are independent from one another, allowing the machine to operate with a single side. Simple swath adjustment is obtained by a system of easy to use bushings. Centrally mounted pivot points gives the rake the ability to "float" over uneven terrain without stressing the frame.

Heavy tubing that make up the rake's main frames are the heaviest in the industry; built to hold up for years of service.

An optional "auto-steer" system will hydraulically pivot the rear wheels during turns to allow the operator to turn sharply in fields. Also, optional hydraulically controlled center double kicker wheel assembly and wind guards are available.

# EASY RAKE SUPERSTAR



Flex frames on 18-20 models allow greater flexibility over all types of terrain.



Swath adjustment by a system of easy to use bushings.



Walking tandem standard on all easy rake superstar models.

## Pull type V rake - EASY RAKE SUPERSTAR

The Easy Rake Superstar is the largest model of our V-Rake Pull-Type line.

Designed to meet the needs of today's hay producers, these high-capacity rakes are available in 16, 18, and 20 wheel configurations, with the 20 wheels having a working width of up to 11.40 meters (37'5").

Easy and innovative folding system allows the operator to work with one side only.

Individual floating rake wheels provide consistent ground pressure as they follow the terrain for clean, positive raking while reducing tine wear and protecting crop stubble.

Large 60" wheels with 7.5mm tines are standard on 16, 18 & 20 wheel units. The heavier tines are rigid enough to allow the units to work well in corn stalks and alfalfa.

The windrow width is changed by a simple bushing system allowing for quick in-field adjustments.

A walking tandem wheel configuration is standard on all models.

In the 18 and 20-wheel versions the side frames hinge to allow the rake to float and adapt to the terrain.

# EASY RAKE AUTOSTEER



## ■ Pull type V rake - AUTOSTEER

Enoagricola Rossi was the first company to develop, build, and apply the auto-steering system to finger wheel rakes. The auto-steering system is a closed hydraulic system made up of hydraulic hoses and two cylinders, one situated on the two-point hitch of the rake and the other on the rear crossbar. This technical innovation enables the machine to steer itself independently, following the path of the tractor, and thus do right-angle turns and maneuver easily in very tight spaces. The system can be applied to both the Easy Rake and the Easy Rake Superstar models.



■ Rear drawbar with steering mechanism



■ 2 point hitch with hydraulic cylinder



■ Easy rake 12 with extra ground wheel kit (optional)